
LED Dimmer Trailing Edge





LOAD COMPATIBILITY

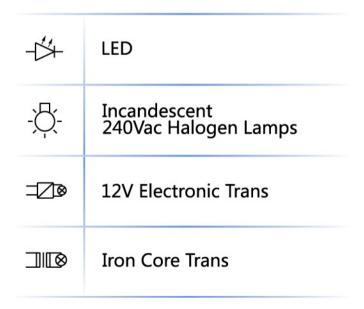

F.A.B.

- Optimised for dimming LED loads.
- Suitable for LED, incandescent, 240V halogen, 12V electronic transformer, etc.
- Minimum load rating 5W.
- Minimum dimming level typically almost 0%.
- 2-wire design, no neutral wire required.
- Thermal wind-back for overload, over-temperature protection.
- Built-in devices for Over-current and short circuit protection.
- Fits for Australian 84mm wall plate.
- Fits for Australian safety and EMC standards.











MODEL	Watt	Voltage	Frequency	Description	Packing
LDT-400A	400W MAX 5W MIN~	AC220~240V	50Hz	Rotary Controlled LED Dimmer,400VA	48pcs/carton 24pcs/inner box

