



| | | | | | |
|--------------------------|-----------------------------|---------------------------|------------------------------|------------------|---|
| LITEON SMD5050 | up to 200 lm/w | CRI 70 | 110° Beam Angle | LM80 | TM21 |
| | | MOSO Driver | Operating temp -20°C~50°C | 90~305Vac | 6KV surge protection |
| | | TGIC painting | | IP65 | IK08 |
| IES available | 50,000 hrs | 5 Year Warranty | CE | RoHS |  |

HIGH BAY ZENITH 3 in 1

Features and Benefits

- Cutting-edge innovation: Slimmer, Lighter and Brighter Design.
- SMD5050 LEDs with life span 108,000hrs@L70B50, SuperLUX up to 200lm/w.
- Driver with 90~305Vac, PF ≥ 0.95, 6kV surge protection, SCP/OVP/OTP protection.
- 3-in-1 Power selectable by dip-switch, less SKU and lower shipping cost.
- Optional PC dot lens with beam angle 60°/90°/110°, easier replacement.
- Improved anti-glare design of Dot lens with UGR ≤ 22@60°/90°.
- IP65+IK08 protection.
- Pre-wired with regular power plug. 1m lead, and mounting hook.
- TGIC tough coating application.
- Available with Surface Mounted installation, default with Ring.
- Available with reflector.
- Complied by IEC60598/CE/RoHS/SAA.
- Rated life span 50,000hrs@L70B50@25C.
- 5-year warranty "RIP" Recall Insurance Policy.

Installation

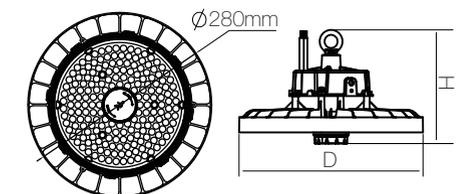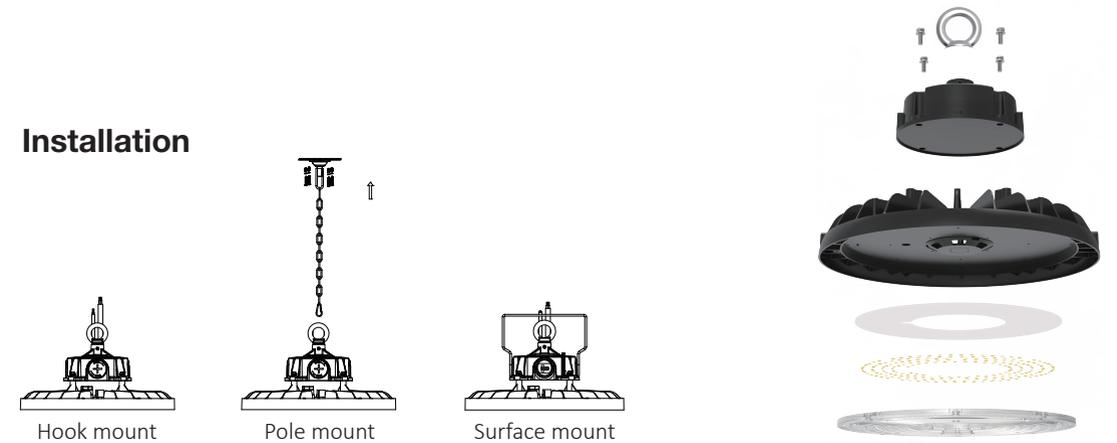

Technical Specifications

| Model No. | Power Selectable | LEDs | Lumen | CCT | CRI | Beam Angle | Voltage | PF | N.W/pc | Surge Protection | Dimension D | H |
|-----------------------|---|--------------------------|---------|-------|-----|------------|-----------|------|--------|------------------|-------------|-------|
| LSZD-200WPS-DL | 200W 150W 100W | LITEON SMD5050 | 40000lm | 5000K | 70 | 110° | 90~305VAC | 0.95 | 1.8kg | 6KV | 280 | 172.7 |